

Blood Bank Refrigerator





TBBR-500-D





- Upright
- Capacity (L) 352 L.
- Range +4 °C

BLOOD BANK REFRIGERATOR WITH TRUE DUALTM COOLING TECHNOLOGY Optimal choice for safe and reliable storage of blood. These models are MDD certified and designed with stabile and reliable temperature uniformity from top to bottom.

SAFE BLOOD STORAGE

The BBR range comes with many special features compared to a standard pharmaceutical refrigerator. To meet the strict requirements of the MDD approval, they come with probes immersed in glycerin, extra security controller, chart recorder and secondary probes, all to preserve the integrity and traceability of the precious blood. The BBR range comes as standard with telescopic drawer systems with lanes and dividers so that you can sort and extract the stored samples with minimum efforts taking up less time when it really matters


OPTIMIZED INTERIOR


The valuable blood is well protected and monitored in our blood banks, ensuring the high quality of your blood bags at all times. Insulated double pane glass doors will prevent condensation and ensures great temperature uniformity. Together with the smart design, glass door and the telescopic drawers in Arctiko's BBR range you are ensured to have maximum capacity of blood bag, a great access and overview of the stored samples and still keeping the blood safe.



Telescopic drawer systems with lanes and dividers so you can sort and extract the stored samples with minimum efforts.


TRUE DUAL TECHNOLOGY

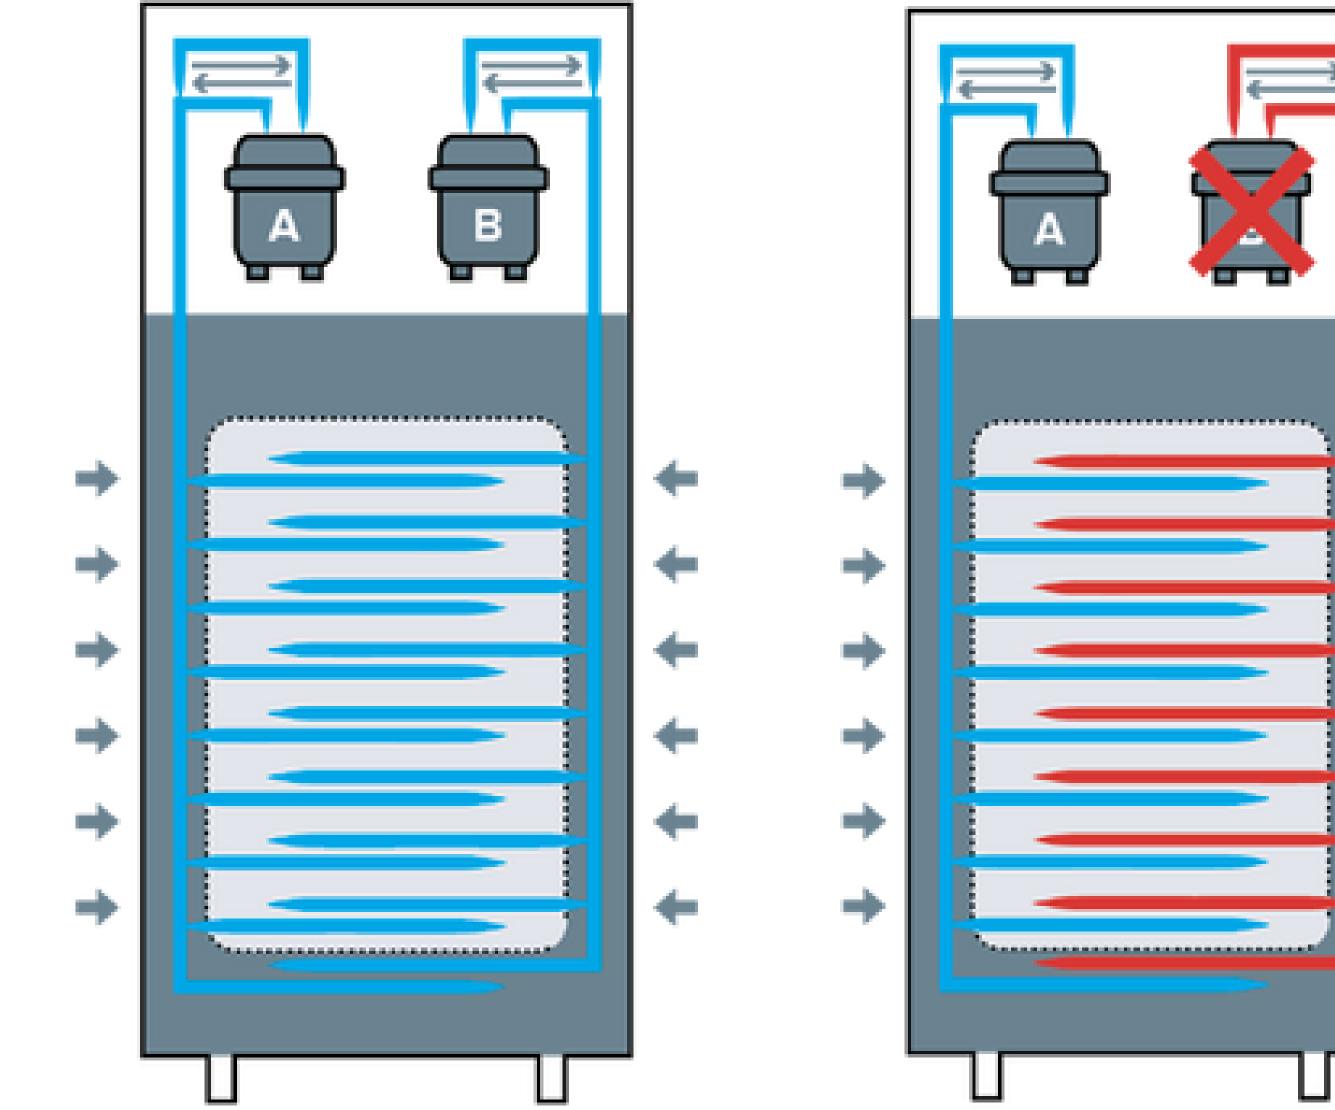


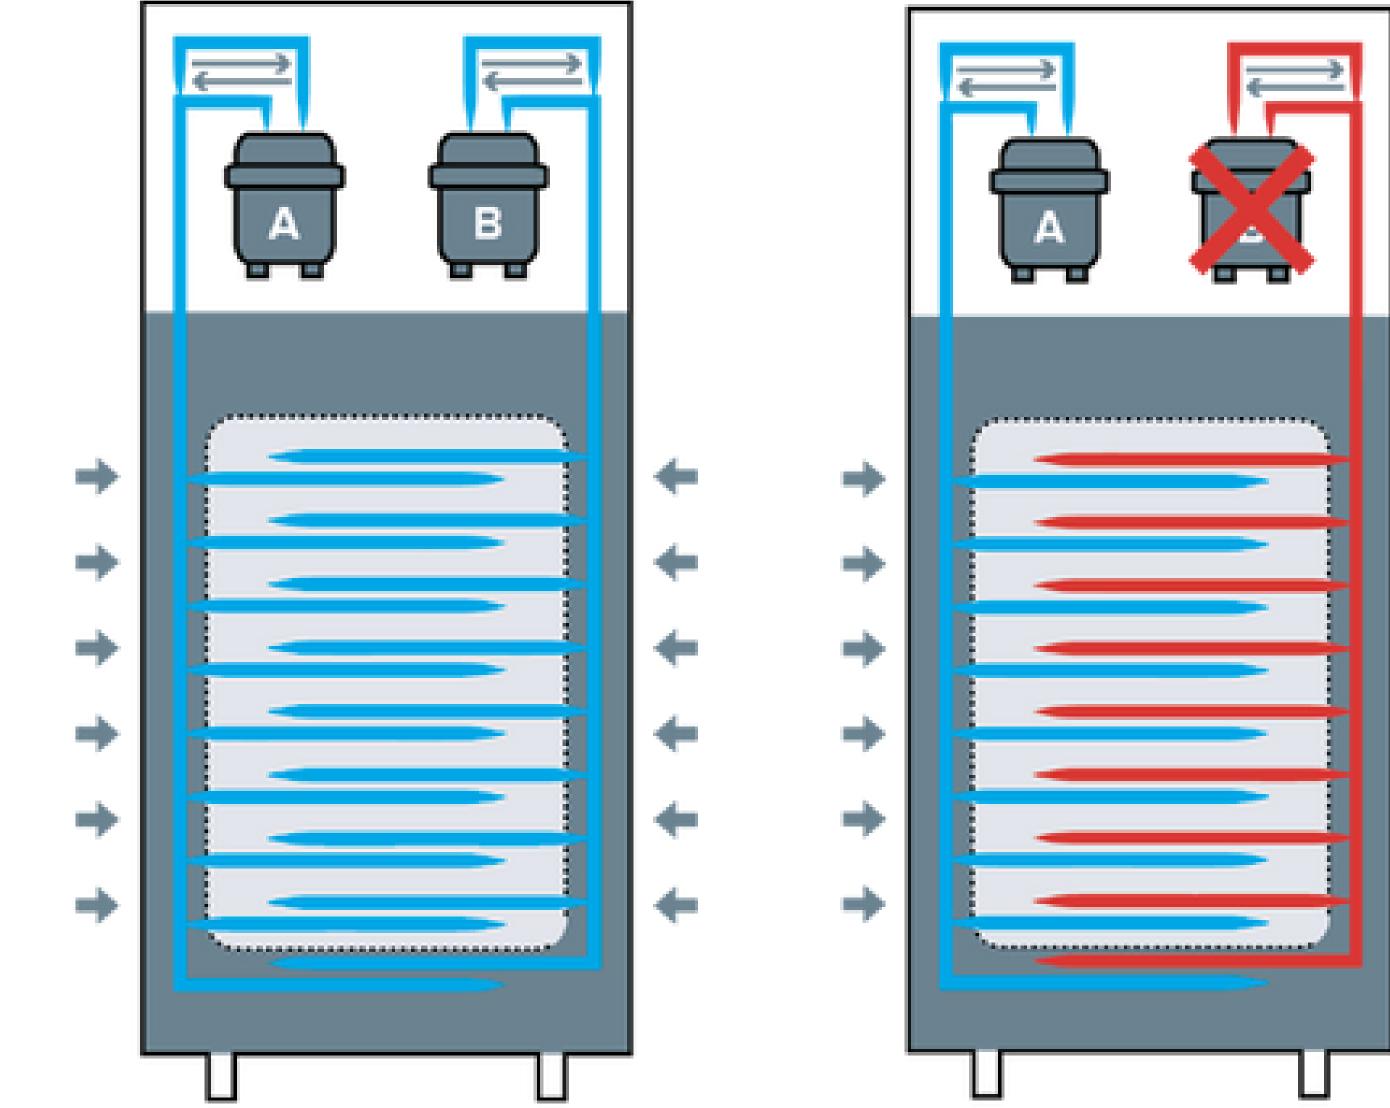

In case of a failure, the **TRUE DUALTM technology** maintains stable a temperature of +4 °C and protects the blood.

MAIN DIMENSIONS

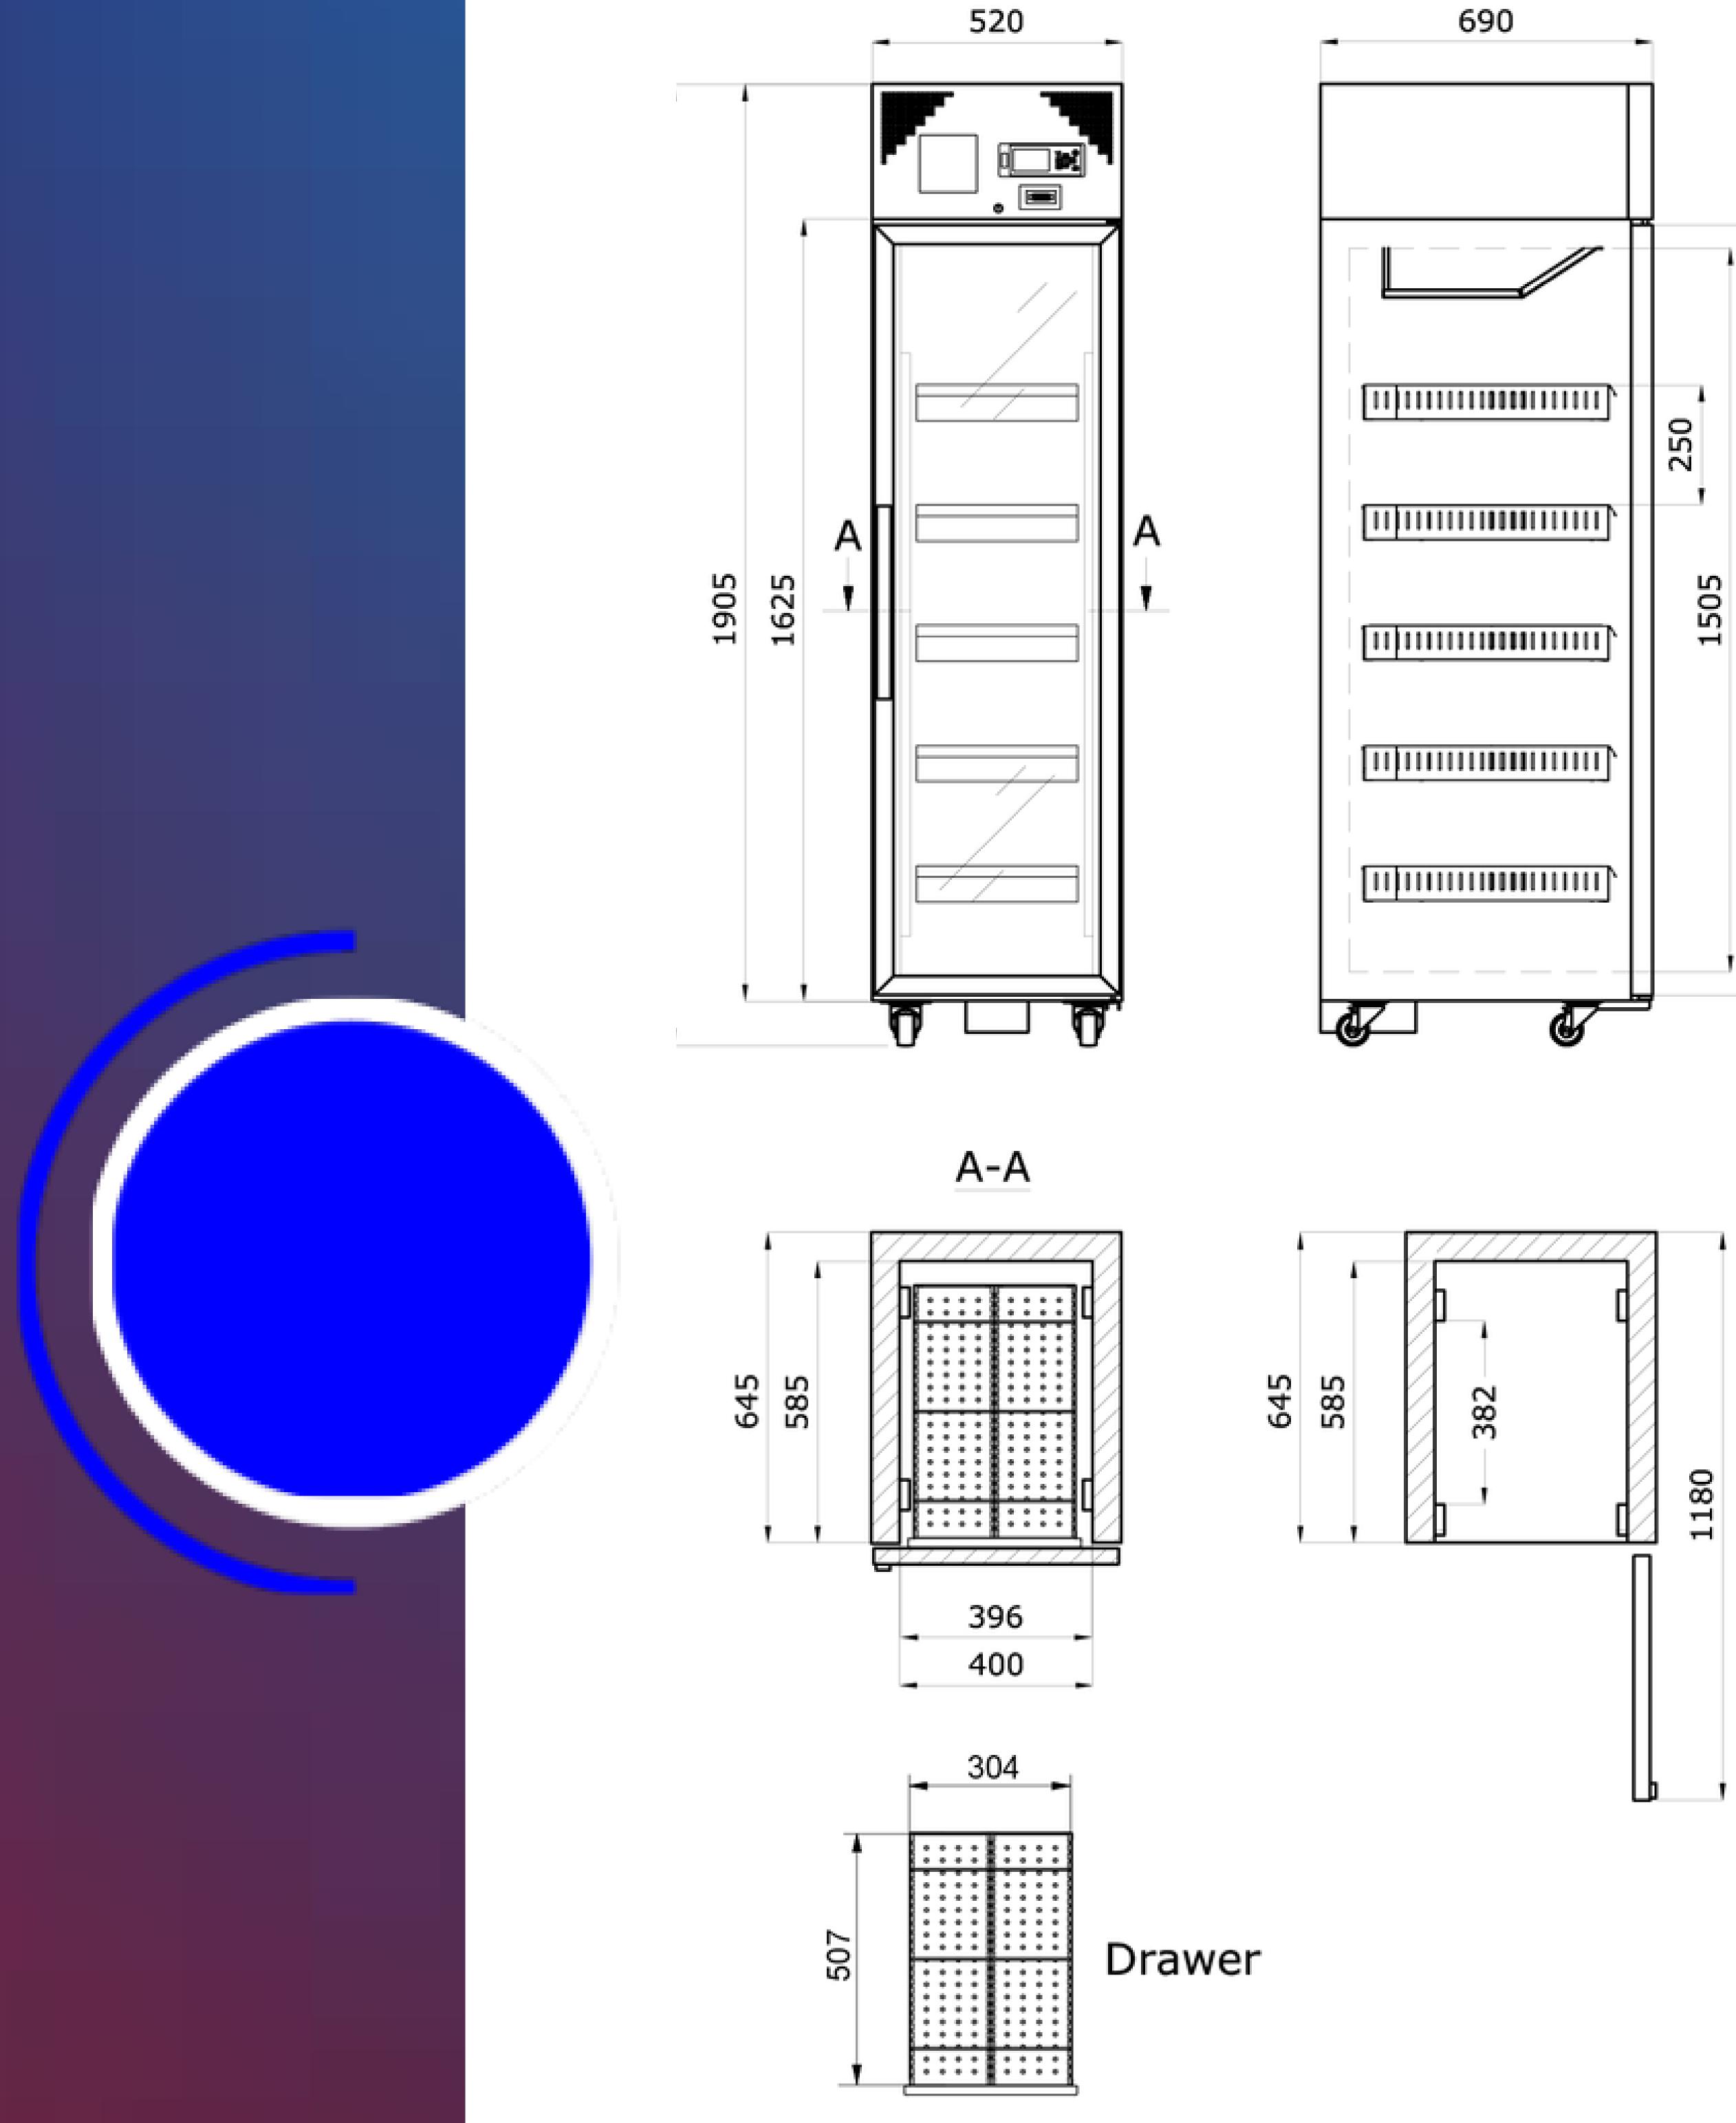

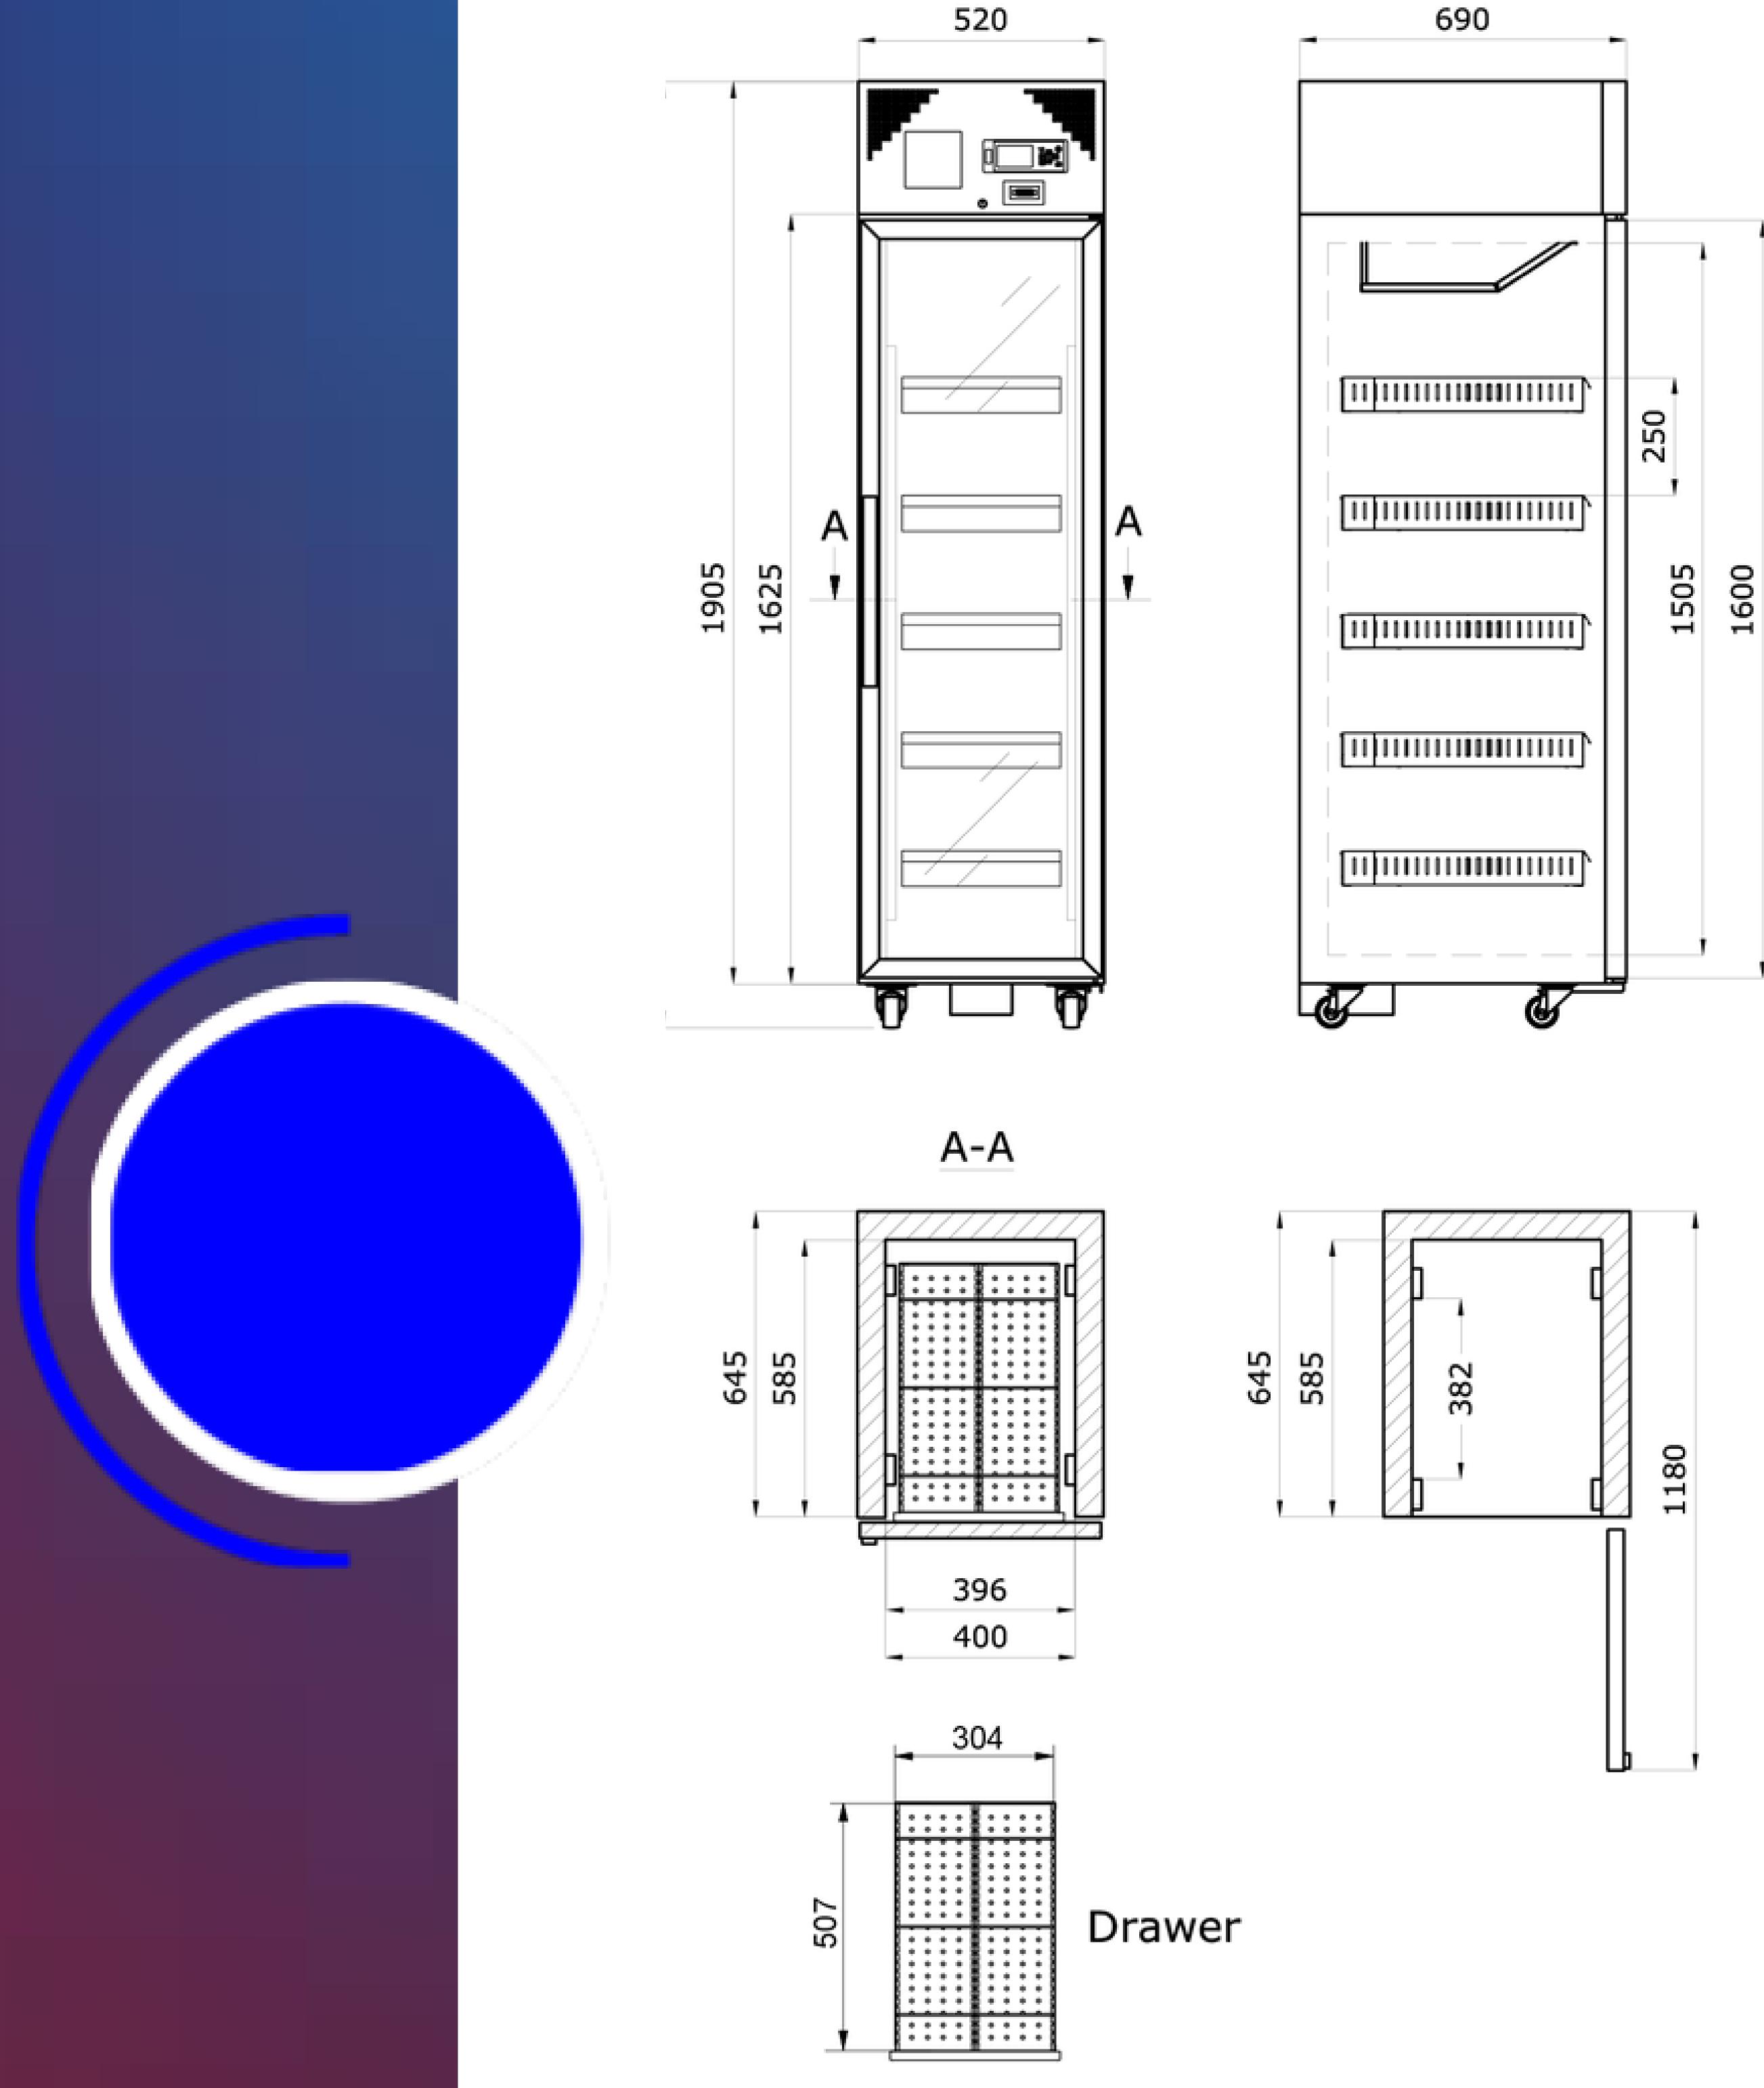

OPTIONAL FEATURES

- GSM alram module
- Modbus adapter
- Voltage stabilizer
- Voltage converters

	MODEL	TBBR-300-D
	Item code	DAI 1140
Specifications	Temperature range (°C)	+4
	Max. ambient temperature (°C)	32
	Capacity (L)	352
	Exterior dimensions WxDxH (mm)	520x690x1997
	Interior dimensions WxDxH (mm)	400x585x1505
	Weight (KG)	148
	Insulation (mm)	60
	Cooling technology	forced air
		G214 / PT1000
	Controller Model / probe type	230
	Power supply (V)	50/60
Power	Frequency (Hz)	
Q	Power consumption (kWh/24h)	6.4
	AMP (A)	2.3
	Power (Watt)	376
	Horse power (HP)	2 x 1/8
Alarm Functions	Alarm display as text - not codes	yes
	Visual / acoustic alarm	yes / yes
	Power failure alarm	yes
	Adjustable high / low temperature alarm	yes / yes
	Open door alarm	yes
Ala	Probe failure alarm	yes
	Low battery alarm	yes
	Compressor failure alarm	yes
	Battery backup for alarms (approx. hrs.)	72
tion	Voltage free contact for remote alarm (e.g. GSM alarm module)	yes
connection	Electronic data logger	yes
	RS 485 port	yes
Data logging external conn	USB port for software update & data download	yes
	Temperature chart recorder	yes
Display Features	Display type	4,3" with touch buttons
	Number of optional reference probes	2
eatu	Password protection for turning unit on / off	yes
	Temperature graph on display	yes
	Automatic defrost	yes
	Antifreeze function	no
	Vacuum release port	no
	Access port for external probe etc. (int. diameter mm)	12
	Light	yes
	Lock with key	
		yes
S	Castors (total pcs) / castors with brake (pcs)	yes 4/2
ures	Castors (total pcs) / castors with brake (pcs) Fixed feet (pcs) / levelling feet (pcs)	
eatures		4/2
Features	Fixed feet (pcs) / levelling feet (pcs)	4/2 no
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s)	4/2 no no
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs)	4/2 no no yes no
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)	4/2 no no yes
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg)	4 / 2 no no yes no no no no
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs)	4 / 2 no no yes no no no 5
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg)	4/2 no no yes no no 5 30
Features	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs)	4/2 no no yes no no 5 30 150
	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors	4/2 no no yes no no 100 150 2
	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant	4/2 no no yes no no no 5 30 150 2 R290*
Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material	4/2 no no yes no no no 5 30 150 2 R290* stainless steel
& Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material	4/2 no no yes no no no 5 30 150 2 R290* stainless steel painted steel
on & Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet)	4/2 no no yes no no no no no 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100 100 1100
on & Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet) Foam type	4/2 no no yes no no no 5 30 5 30 150 2 8290* stainless steel painted steel white polyurethane
on & Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet) Foam type VIP vacuum insulated panels	4/2 no no yes no no no no no 100 100 100 100 100 100 100 100 100 100 100 100 1150 <
Refrigeraton	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet) Foam type VIP vacuum insulated panels Shipping weight (kg)	4/2 no no yes no stainless stainless steel painted steel white polyurethane no 217
on & Cabinet	Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet) Foam type VIP vacuum insulated panels	4/2 no no yes no no no no no 100 100 100 100 100 100 100 100 100 100 1150 1150 12 R290* Stainless steel painted steel white polyurethane no



Email Us info@tempininstruments.com sales@tempininstruments.com

Address: 260 Salmon St,London NW9 8XY, United Kingdom