




Blood Bank Refrigerator



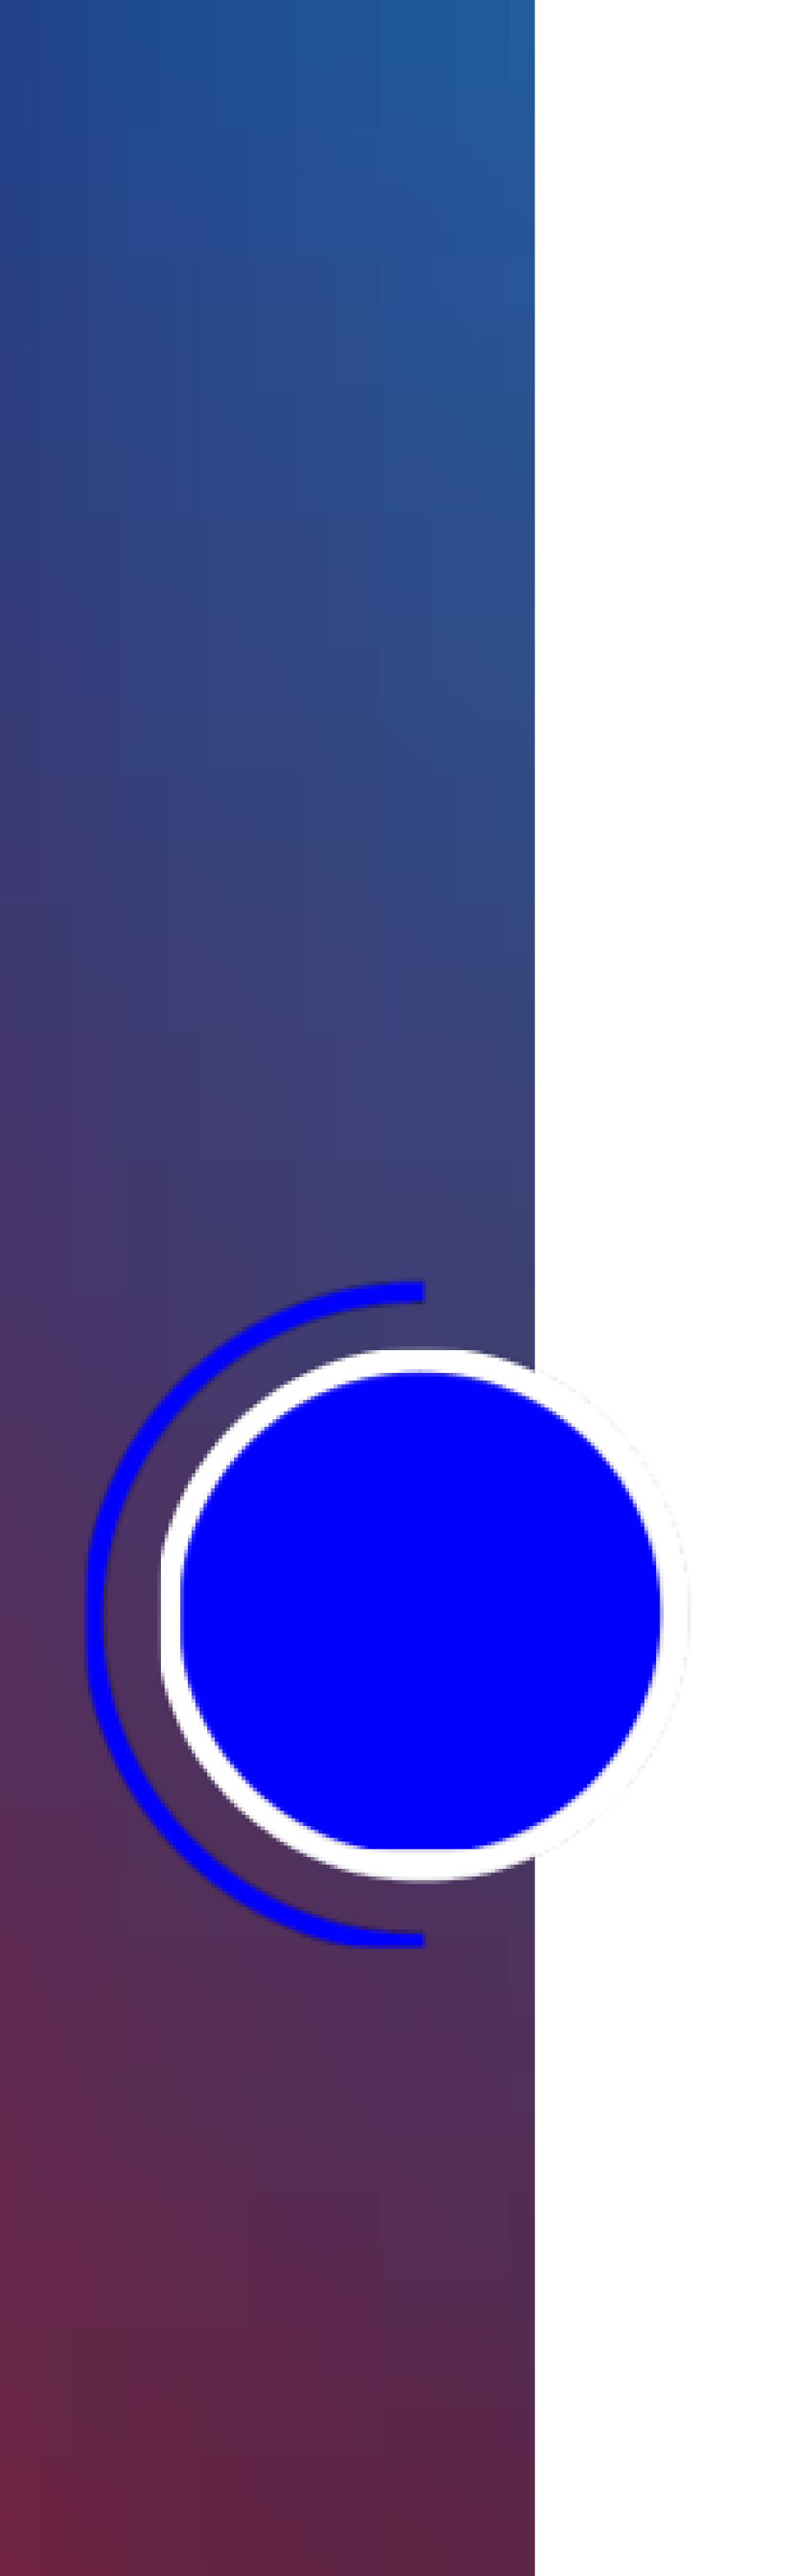

TBBR-700

# **Features**

- Upright
- Capacity (L) 628 L.
- Range +4 °C

BLOOD BANK REFRIGERATOR WITH TRUE DUALTM COOLING TECHNOLOGY Optimal choice for safe and reliable storage of blood. These models are MDD certified and designed with stabile and reliable temperature uniformity from top to bottom..

#### SAFE BLOOD STORAGE

The BBR range comes with many special features compared to a standard pharmaceutical refrigerator. To meet the strict requirements of the MDD approval, they come with probes immersed in glycerin, extra security controller, chart recorder and secondary probes, all to preserve the integrity and traceability of the precious blood. The BBR range comes as standard with telescopic drawer systems with lanes and dividers so that you can sort and extract the stored samples with minimum efforts – taking up less time when it really matters


#### **OPTIMIZED INTERIOR**


The valuable blood is well protected and monitored in our blood banks, ensuring the high quality of your blood bags at all times. Insulated double pane glass doors will prevent condensation and ensures great temperature uniformity. Together with the smart design, glass door and the telescopic drawers in Arctiko's BBR range you are ensured to have maximum capacity of blood bag, a great access and overview of the stored samples and still keeping the blood safe.

Telescopic drawer systems with lanes and dividers so you can sort and extract the stored samples with minimum efforts.




## MAIN DIMENSIONS

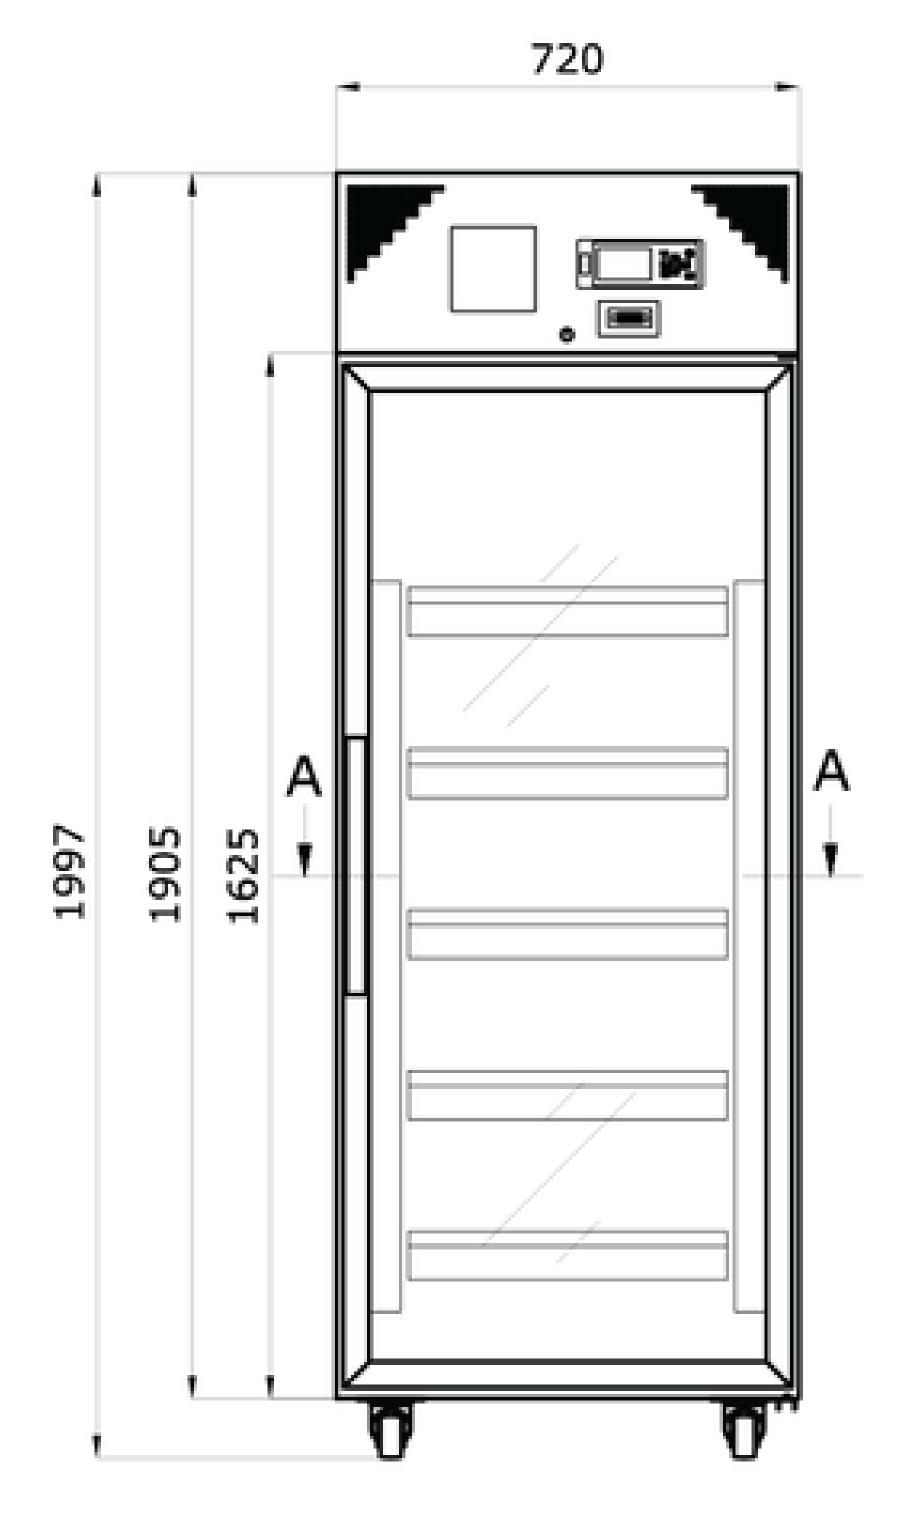

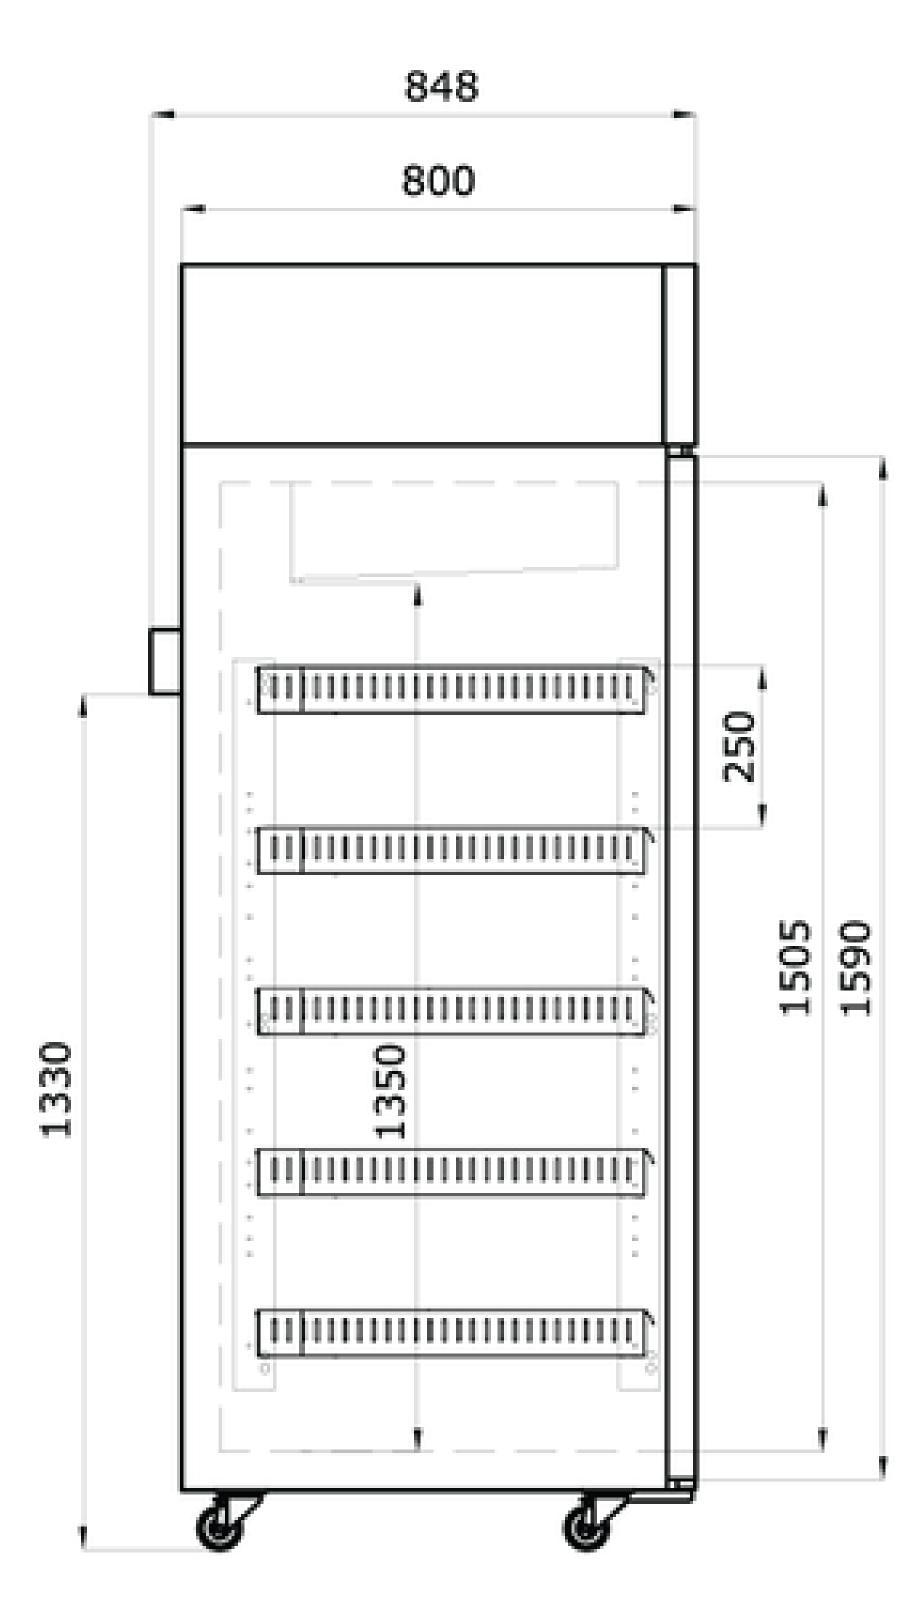



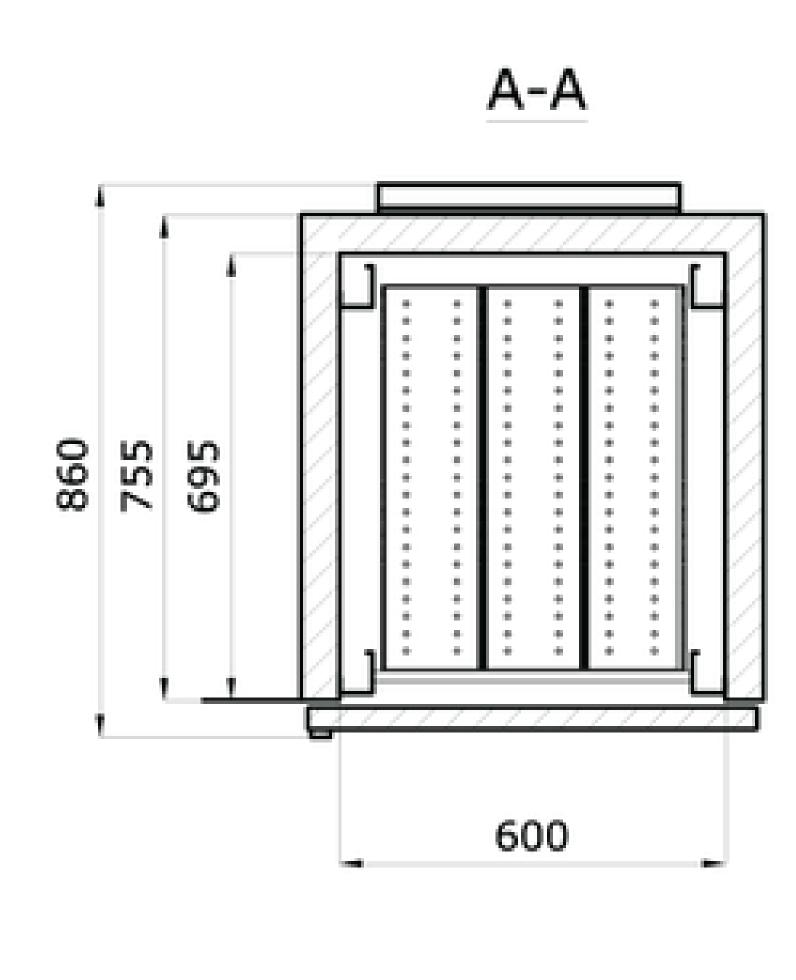


755

695

536

1528

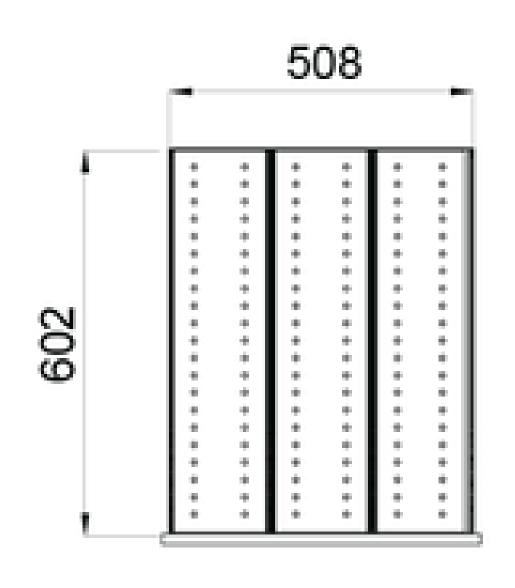

Drawer

### **OPTIONAL FEATURES**

- GSM alram module
- Modbus adapter
- Voltage stabilizer
- Voltage converters



	MODEL	TBBR-700
	Item code	DAI 1125
	Temperature range (°C)	+4
	Max. ambient temperature (°C)	32
Specifications	Capacity (L)	628
	Exterior dimensions WxDxH (mm)	720x860x1997
	Interior dimensions WxDxH (mm)	600x695x1505
ecifi		
Spo	Weight (KG)	163 60
	Insulation (mm)	forced air
	Controller Model / probetype	
	Controller Model / probe type	G214 / PT1000
Power	Power supply (V)	230
	Frequency (Hz)	50/60
	Power consumption (kWh/24h)	5.8
	AMP (A)	2.4
	Power (Watt)	413
	Horse power (HP)	1/4
Alarm Functions	Alarm display as text - not codes	yes
	Visual / acoustic alarm	yes / yes
	Power failure alarm	yes
	Adjustable high / low temperature alarm	yes / yes
	Open door alarm	yes
	Probe failure alarm	yes
	Low battery alarm	yes
	Compressor failure alarm	no
	Battery backup for alarms (approx. hrs.)	72
tion	Voltage free contact for remote alarm (e.g. GSM alarm module)	yes
Data logging & external connection	Electronic data logger	yes
	RS 485 port	yes
	USB port for software update & data download	yes
	Temperature chart recorder	
	Temperature chart recorder	yes
	Display type	yes 4,3" with touch buttons
		,
	Display type	,
	Display type  Number of optional reference probes	4,3" with touch buttons
	Display type  Number of optional reference probes  Password protection for turning unit on / off	4,3" with touch buttons  2  yes
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display	4,3" with touch buttons  2  yes  yes
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost	4,3" with touch buttons  2  yes  yes  yes
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function	4,3" with touch buttons  2  yes  yes  yes  no
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port	4,3" with touch buttons  2  yes  yes  no  no
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)	4,3" with touch buttons  2  yes  yes  no  no  12
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light	4,3" with touch buttons  2  yes  yes  no  12  yes
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key	4,3" with touch buttons  2  yes  yes  no  no  12  yes  yes
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)	4,3" with touch buttons  2 yes yes no no 12 yes yes 4/2
	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)	4,3" with touch buttons  2 yes yes no no 12 yes yes 4/2 no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)	4,3" with touch buttons  2 yes yes no no 12 yes yes 4/2 no no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes yes no 10 11 yes yes yes yes yes yes no no no no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs)  Max. load per shelf (kg)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no no solutions
Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no solutions
Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no solutions
Display Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no so
& Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no syes no no no syes no no so so so 300 300 1 R290* stainless steel
& Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant  Interior cabinet material  Exterior cabinet material	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no syes no no no 12 12 14 15 16 17 18 18 18 18 18 18 18 18 18 18 18 18 18
& Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant  Interior cabinet material  Exterior cabinet material  Colour (exterior cabinet)	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no syes no no no 15 30 300 1 R290* stainless steel painted steel white
& Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant  Interior cabinet material  Exterior cabinet material  Exterior cabinet material  Colour (exterior cabinet)  Foam type	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no syes no no no 15 30 300 1 R290* stainless steel painted steel white polyurethane
Refrigeration & Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant  Interior cabinet material  Exterior cabinet material  Colour (exterior cabinet)  Foam type  VIP vacuum insulated panels	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no syes no no no syes no no so stainless steel painted steel white polyurethane no
Refrigeraton & Cabinet Features Features Features	Display type Number of optional reference probes Password protection for turning unit on / off Temperature graph on display Automatic defrost Antifreeze function Vacuum release port Access port for external probe etc. (int. diameter mm) Light Lock with key Castors (total pcs) / castors with brake (pcs) Fixed feet (pcs) / levelling feet (pcs) Sub lids / inner doors (pcs) Reversible door(s) Fixed shelves (pcs) / adjustable shelves (pcs) Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs) Max. load per shelf (kg) Adjustable drawers (pcs) Max. load per adjustable drawer (kg) Max. no. of blood bags - by standard no. of adj. drawers (pcs) Number of compressors Refrigerant Interior cabinet material Exterior cabinet material Colour (exterior cabinet) Foam type VIP vacuum insulated panels Shipping weight (KG)	4,3" with touch buttons  2 yes yes yes no no no 12 yes yes 4/2 no no no no syes no no no so so ano ano so ano ano ano base stainless steel painted steel white polyurethane no 250
& Cabinet Features Features Features	Display type  Number of optional reference probes  Password protection for turning unit on / off  Temperature graph on display  Automatic defrost  Antifreeze function  Vacuum release port  Access port for external probe etc. (int. diameter mm)  Light  Lock with key  Castors (total pcs) / castors with brake (pcs)  Fixed feet (pcs) / levelling feet (pcs)  Sub lids / inner doors (pcs)  Reversible door(s)  Fixed shelves (pcs) / adjustable shelves (pcs)  Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)  Max. load per shelf (kg)  Adjustable drawers (pcs)  Max. load per adjustable drawer (kg)  Max. no. of blood bags - by standard no. of adj. drawers (pcs)  Number of compressors  Refrigerant  Interior cabinet material  Exterior cabinet material  Colour (exterior cabinet)  Foam type  VIP vacuum insulated panels	4,3" with touch buttons  2 yes yes yes no no 12 yes yes 4/2 no no no no no syes no no no syes no no so stainless steel painted steel white polyurethane no



Email Us info@tempininstruments.com sales@tempininstruments.com